DENVER RTD EAGLE P3

COMMUNICATION SYSTEM

FIELD MODIFICATION INSTRUCTIONS

FMI #11: RS485 BOARD REPLACEMENT

CONTRACT NO.	P110701149
CDRL NO.	N/A
WIS DOC. NO.	42A-2016-0031
REVISION:	1.0
DESIGNED:	D. S. JANG
REVIEWED:	J. Y. LEE
APPROVED:	B. J. JONE
DATE:	7/27/2016

WOOJIN
Industrial Systems Co., Ltd.

Record of Revisions

Rev.	Date	Description	Entered By
1.0	7/27/2016	Initial release	D. S. Jang

© Copyright Woojin Industrial Systems Co., Ltd.

Table of Contents

1. INTRODUCTION 4

2. SUMMARY 4

3. INSTRUCTIONS 4

3.1 UNIT REPLACEMENT 4

3.2 TEST AND VERIFICATION 6

4. TRACKING 6

© Copyright Woojin Industrial Systems Co., Ltd.

1. INTRODUCTION

This FMI provides instructions to replace the CRA-RS485 circuit boards on the fleet.

2. SUMMARY

This field modification is a follow-up to the temporary relay replacement carried out on May 2016. To prevent the potential quality issues may have been produced due to the temporary on-PCB rework, Woojin plans to replace all RS485 circuit boards in complete PCB level.

The board replacement will be done by 10 PCB's (=5 married pairs) at a time. The process will be repeated until the entire fleet is completed.

3. INSTRUCTIONS

3.1 UNIT REPLACEMENT

1) Place the COMCB to OFF position

2) Unscrew 4 mounting bolts on the RS-485 front panel

3) Remove the RS-485 board from CRA

4) Plug in the New RS-485 board

5) Fasten 4 mounting bolts on the RS-485 front panel

6) Place the COMCB to ON position

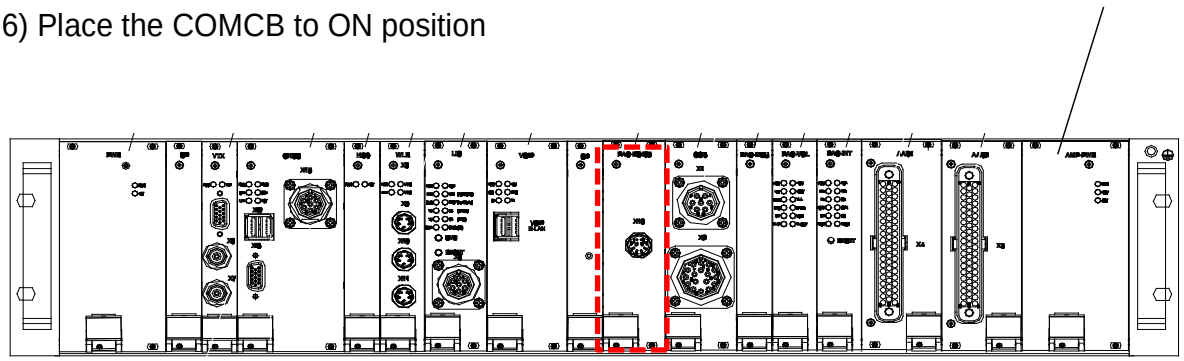

Figure 1 – RS-485 Board Location

© Copyright Woojin Industrial Systems Co., Ltd.

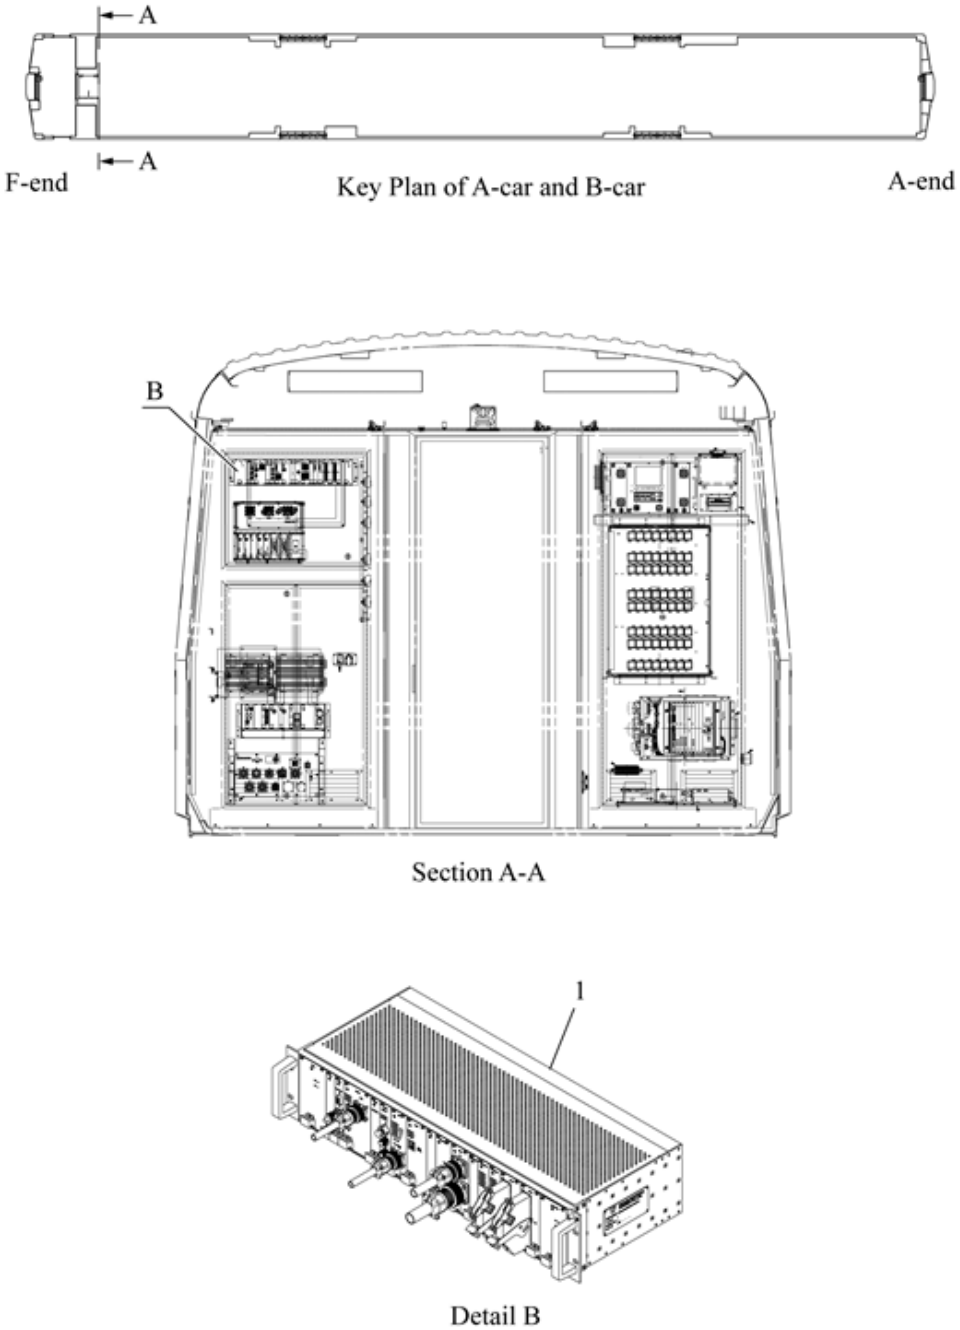

Figure 2 – CRA Location

© Copyright Woojin Industrial Systems Co., Ltd.

3.2 TEST AND VERIFICATION

After updating the CRA-Main software, follow the procedure below to verify the functionality:

1) Key-on the cab
2) Using the CCP touchscreen, enter route number 10 or 11
3) Run the route simulation
4) Verify the simulated announcements and displays function appropriately.

4.TRACKING

Status of the field modification activities will be tracked and managed for car number and items completed. The progress will be reported to DTP/H-Rotem in daily basis as the modification proceeds.

© Copyright Woojin Industrial Systems Co., Ltd.